

FIDO® X2

Ultra-Lightweight Explosives Trace Detector



The Fido X2 is an ultra-lightweight, handheld explosives trace detector (ETD). It provides an unprecedented combination of sensitivity, speed, and ease of use. Its award-winning TrueTrace™ technology detects threats with higher sensitivity and faster clear-down than similar products. Fido X2 performs fast ten-second analysis and provides cost-effective operation with reusable sampling swipes. On-device video training provides real-time help and reduces the cost and logistical burden of recurrent training. With thousands of units fielded in over 40 countries, Fido X-series products are the most trusted handheld ETDs for critical security applications.

FAST, TRUETRACE DETECTION

Enables rapid threat screening in sporting arenas, mass transit facilities, hotels, private venues, and other critical infrastructure

- Fast three-minute start-up
- Analysis in less than ten seconds
- Rapid clear-down within seconds
- No radioactive source or hazardous materials

BEST-IN-CLASS SENSITIVITY

Patented TrueTrace technology detects explosives with better sensitivity than similar products

- Broad, class-based identification
- Detects multiple types of homemade, commercial, and military explosives with a single sample
- More sensitive than other products in its class
- Reusable sampling swipes, vapor detection capability

SIMPLE, GUIDED OPERATION


Guided user interface aids the operator with sampling and decision-making

- On-screen prompts
- Simple go/no-go alarms
- On-device video training
- Ultra-lightweight <1.5 lbs (680 g)



SPECIFICATIONS

Fido X2	
Technology	TrueTrace™; multi-channel fluorescence technology; no radioactive source
Sampling & Analysis	
Sample Introduction	Sampling swipes for surfaces; vapor sampling with optional accessory
Sample Phase	Trace particulate and vapor
Threats	Detects homemade, commercial, and military explosives
Sampling & Analysis	Analysis ≤10 seconds
System Interface	
Display & Alerts	Visible, audible, and haptic (vibration) alerts; vivid, sunlight-readable color display (32k colors)
Localization	Language translation available worldwide
Communication	USB 2.0 (Mini-USB)
Data Storage	10,000 discrete files; First-in, First-out (FIFO) automatic overwrite
Data Management	On-device report generation; export to mass storage
User Levels	Operator
Power	
Input Voltage	100-240 VAC (wall adapter supplied); runs device and charges battery simultaneously
Battery Specs	Rechargeable and swappable Li-ion battery; adapter included
Startup Time	3 minutes from cold
Environmental	
Operating Temperature	32 to 113 °F (0 to 45 °C)
Operating Humidity	5% to 95% non-condensing
Storage Temperature	14 to 122 °F (-10 to 50 °C)
Physical Features	
Dimensions (L x W x H)	12.7 x 3.9 x 2.8 in (32.2 x 10.0 x 7.2 cm) - with swab desorber and battery (standard model) 10.6 x 4.1 x 2.8 in (27.0 x 10.5 x 7.0 cm) - with vapor sampling accessory and battery
Weight	1.5 lbs (680.4 g)
Enclosure & Protection	Flame retardant PC-ABS alloy with aluminum reinforcements

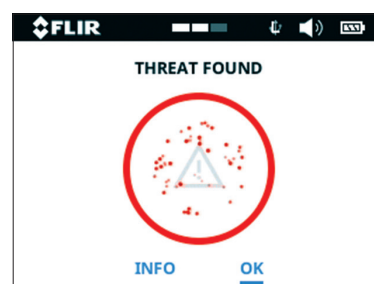

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.teledyneflir.com

AMERICAS

7055 Troy Hill Dr. Suite 300
Elkridge, MD 21075 USA

APAC

10 Kallang Avenue #09-10
Aperia Tower 2
Singapore 335910

EMEA

Luxemburgstraat 2
2321 Meer
Belgium

This product is subject to United States export regulations and may require US authorization prior to export, reexport, or transfer to non-US persons or parties. Diversion contrary to US law is prohibited. For assistance with confirming the Jurisdiction & Classification of Teledyne FLIR, LLC products, please contact exportquestions@flir.com. ©2021 Teledyne FLIR LLC. All rights reserved.

Revised on 11/10/21
Fido X2_Datasheet-A4 21-1110